




CARBORUNDUM UNIVERSAL LIMITED



Abrasives for Auto & Auto Ancl. Industry

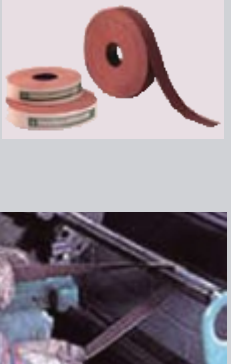
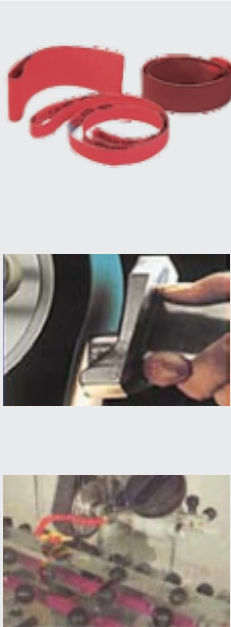


	Application	Product Code	Grain	Bond	Backing	Coating	Grit Range	Brand	Forms	Features
 	Medium weld removal on M.S. sheet metal works	VR541	Alo.	R/R	Fibre 0.8mm	●	24-80	Jawan	Disc	Tough grain, strong backing, ensures good material removal rate.
		FR541	Alo.	R/R	Fibre 0.6mm	●	100-120	Jawan	Disc	Flexible backing, adheres to contours, good finish. For light application only
	Heavy weld/material removal on alloy steels, sheet metal	VR561	Premium Alo	R/R	Fibre 0.8mm	●	24-80	Alpha Supreme	Disc	Special grain with strong backing-aggressive cut
		FR561	Premium Alo	R/R	Fibre 0.6mm	●	100-120	Alpha Supreme	Disc	Flexible backing, adheres to contours, good finish.
	Heavy weld/material removal on alloy steels, S.S.	VR582	Zirconia Alumina	R/R	Fibre 0.8mm	●	24-60	Cumizon	Disc	Superior grain, tough bond is best suited for heavy grinding on S.S. & alloy steel.
 	Finishing sheet metal work-to cover up grind line marks using orbital sanders prior to painting.	FP544/EP544	Alo	R/R	'E'/'F' wt paper	◐	36-400	Supreme	Discs (Hook & Loop PSA)	Excellent for finishing grinding line marks, particularly after fibre disc/flap discs sanding operation.
		FP584/EP584	Zirconia Alumina	R/R	'E' wt paper	◐	36-120	Supreme	Discs (Hook & Loop PSA)	Excellent for finishing grinding line marks. More aggressive action due to superior grain.
		XM544	Alo.	R/R	'X' wt Cotton	◐	60-120		Discs (Hook & Loop)	Cotton backing makes this product work more aggressively compared to paper
		XF567	Premium Alo	R/R	'X' wt Cotton	●	60-400	Jawan Supreme	Discs (Hook & Loop PSA)	Special grain, for aggressive cut, higher material removal rate. Can be used on SS
		XM584	Zirconia Alumina	R/R	'X' wt Cotton	◐	24-120		Discs (Hook & Loop)	Superior grain with strong backing for aggressive cut on S.S. & alloy steel
 	Surface preparation of auto components like, rims, silencer, crash guards etc prior to electro-plating	XG542	Alo	R/R	'X' wt Cotton	●	36-400	Hi-Life	Flap wheels	Product for buffing operation, specially designed for long life
		XG542	Alo	R/R	'X' wt Cotton	●	36-400	Hi-Cut	Flap wheels	Product for buffing operation and specially designed for faster cutting and high material removal rate.
		XF567	Premium Alo	R/R	'X' wt Cotton	●	36-400	Hi-Flex	Flap wheels	Special grain with strong backing for aggressive cut, higher material removal rate.

○ - Open

◐ - SemiOpen

● - Closed

	Application	Product Code	Grain	Bo	Backin	Coating	Grit Range	Brand	Forms	Features
	Preparation of surfaces prior to painting.	DV371	Silicon Carbide	R/R	'D'wt paper	●	60-220	Jawan	Sheets & psa disc	Hard grain for sanding surfaces, sealants, fillers etc. Treated for minimum water absorption during wet sanding.
		CV371	Silicon Carbide	R/R	'C'wt paper	●	320-1200	Jawan	Sheets & psa disc	Hard grain for sanding fillers, in-between coats etc. Specially treated for profile sanding.
		CL558	AlO	R/R	'C'wt paper	●	80-1000	CUMI	Sheets	Special grains for sanding hard coatings etc. Latex impregnated paper adheres to profiles
	De-rusting, surfaces/ parts	JG121	Emery	G/G	'J'wt cotton	●	24-220	Ajax	Rolls, sheets	Soft bond, flexible backing adheres to contours and cleans up surfaces
		PG121	Emery	G/G	'J'wt cotton	●	24-220	Jawan	Rolls, sheets	Soft bond, flexible backing makes it adhere to contours and cleans up surfaces. Economic product.
	Finishing of machined, ground components like crankshafts, camshafts etc.	JG141	AlO	G/G	'J'wt Cotton	●	36-400	Ajax	Rolls	Tough grain, soft bond, adheres to profiles, generates excellent finish. Do not use with water or water based coolants. Can be used with neat oils.
		JG242	AlO	R/G	'J'wt Cotton	◐	36-320	Ajax	Rolls	Tough grain, strong bond ensures excellent cutting, faster material removal.
	Grinding, de-burring, generating flat surfaces using portable, stationary belt machines.	XG241	AlO	R/G	'X'wt Cotton	◐	36-400	Jawan	Belts	For mild de-burring of low carbon steel products, with low belt speed
		XG542	AlO	R/R	'X'wt Cotton	●	24-600	Jawan	Belts	Universal product for use on contact wheel machines, platensanders, wide belt sanders. Good for low carbon steel.
		XS561	Premium AlO	R/R	'X'wt Cotton	●	36-120	Ajax Supreme	Belts	Special product for aggressive cut on medium carbon steel-for use on contact wheel machines.
		XS581	Zirconia Alumina	R/R	'X'wt Cotton	●	24-80	Ajax/Jawan	Belts	Special product to give high material removal rate on high carbon steel, SS performs best with hard rubber contact wheels.
		XW571	Silicon Carbide	R/R	'X'wt Cotton	●	36-400	Ajax/Jawan	Belts	For wet /dry grinding of glass using SPM.

○ - Open

◐ - SemiOpen

● - Closed